



光纤跳线

LC-ST 双芯



型号：LC-ST 双芯

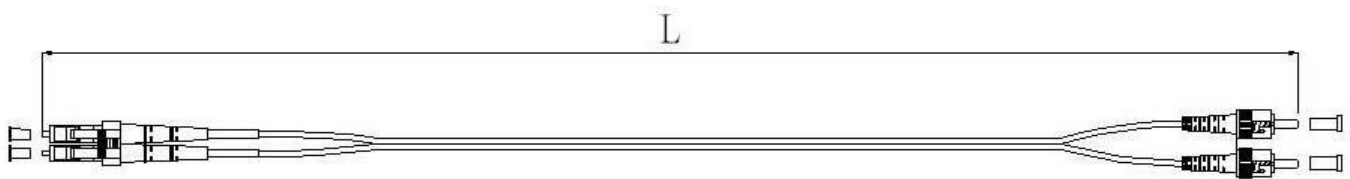

规格参数：

- ¥ 端面：PC, UPC 或 APC
- ¥ 光纤类型：单模：ITU-TG.652, G655, G657；多模光纤：ITU-TG.651
- ¥ 标准散件，陶瓷插芯
- ¥ 光缆外径：2.0×4.1(mm)或 2.8×5.7 (mm) 或按客户要求订制
- ¥ 光纤规格：9/125 μm (OS1), 62.5/125μm (OM1), 50/125μm (OM2, OM3, OM4)
- ¥ 插入损耗：≤0.3dB
- ¥ 回波损耗：UPC SM ≥ 50dB
APC SM ≥ 60 dB
PC MM ≥ 20 dB
- ¥ 可靠性：≤ 0.2 dB
- ¥ 重复性：≤ 0.1 dB
- ¥ 使用温度范围：-20°C ~ 70°C
- ¥ 储存温度范围：-40°C ~ 80°C
- ¥ 光缆拉力：100N (短期)
- ¥ 最小弯曲半径：35mm (G652) 15mm (G657A)
- ¥ 光缆外皮：PVC 或 低烟无卤(LSZH)